



## TSB - JD04

Models applicable > John Deere 5200 to 5700 series

Details > with standard transmission > 280/280mm Omg clutch

Ag Clutch Part numbers > 228 2801 JD and 628 2801 JD

### CLUTCH KIT REPLACEMENT

(using Luk aftermarket)

228 2801 JD (Omg)




The original assembly has both main and PTO discs integrally fitted

628 2801 JD (LuK)



The LuK aftermarket assembly has integral main and loose PTO discs

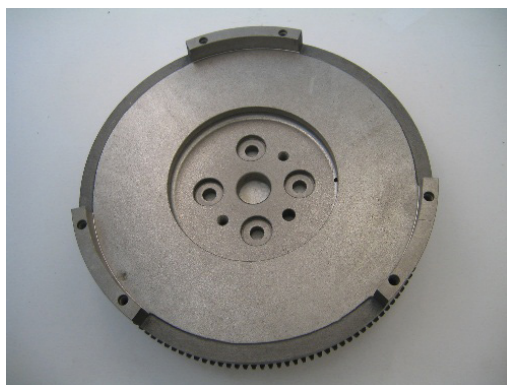

### FLYWHEEL MUST BE MODIFIED

When replacing the original Omg clutch assembly with the aftermarket LuK clutch kit, the flywheel must have the lower mounting face machined out until the total depth of the flywheel = 24.6mm if the clutch disc is 12.0mm overall thickness.

If the clutch disc is 7.6mm thick then the flywheel recess needs to be modified to 20.0mm. This lower face is then utilized as a conventional style flywheel allowing the operation of the modified PTO disc, whilst incorporating the same Safety PTO style release mechanism. The LuK kit contains the modified PTO disc, a new bolt set and replacement PTO bearing with housing.

Note > This must be installed as matched set only, and must not be interchanged with the original Omg individual components.

### LEADING BRANDS



[australianclutch.com.au](http://australianclutch.com.au)

1800 CLUTCH (258824)